



FEATURES




Heat & Cool Mode



Environmental Friendly
CFC Free Refrigerant R410A

- On-Off Timer with Real Time Clock • Turbo Mode • Sleep Mode
- Auto Restart • 5 Operation Modes - Auto / Cool / Dry / Fan / Heat
- Self Diagnostic • 7 Segment LED Display • Night Display Off
- Auto Defrost • Blow/Clean • LCD Remote Control

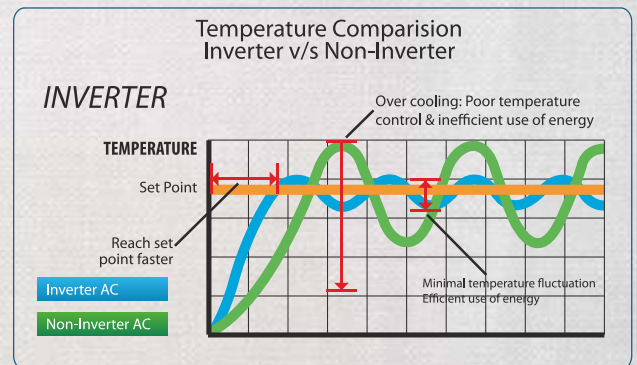

SPECIFICATIONS*

Split Air Conditioner - Inverter Type

	Parameters	ZI018XXCV1
Rating	Rated Capacity Cooling - (Min - Max) (Watts)	1800-5300
	Rated Capacity Heating - (Min - Max) (Watts)	1600-6100
	EER Cooling (Min ~ Max) (W/W)	2.52~3.6
	COP Heating (Min ~ Max) (W/W)	2.44~3.55
Performance	Air Flow Volume (Cooling) CFM	466
	Noise Level Max (Indoor) dB (A)	47
	Operating Temperature (Cooling) °C	10°C to 46°C
	Operating Temperature (Heating) °C	6°C ~ 24°C
Electrical Rating	Power Supply - V/Ph/Hz	230 V/1Ph/50 Hz
	Rated Power Consumption Cooling (Min - Max) (Watts)	500-2100
	Rated Power Consumption Heating (Min - Max) (Watts)	450-2500
	Rated Running Current Cooling (Min - Max) Amp	2.2-9.3
	Rated Running Current Heating (Min - Max) Amp	2.0-10.6
Refrigerant	Refrigerant Type	R410A
Heat Exchanger	Evaporator Type	Copper Tube - Aluminium Fin Type
	Condensor Type	Copper Tube - Aluminium Fin Type
Dimensions (Indoor)	Net (WXDXH) mm	940×300×220
	Gross (WXDXH) mm	993×360×285
Dimensions (Outdoor)	Net (WXDXH) mm	800×300×590
	Gross (WXDXH) mm	940×420×690
Weight	Net (IDU/ ODU) (Kg)	12/41
	Gross (IDU/ODU) (Kg)	14/44

*Due to continuous product development, these specifications are subject to change without any prior notice.